


JM *Technical Textiles*

JM Ceiling White



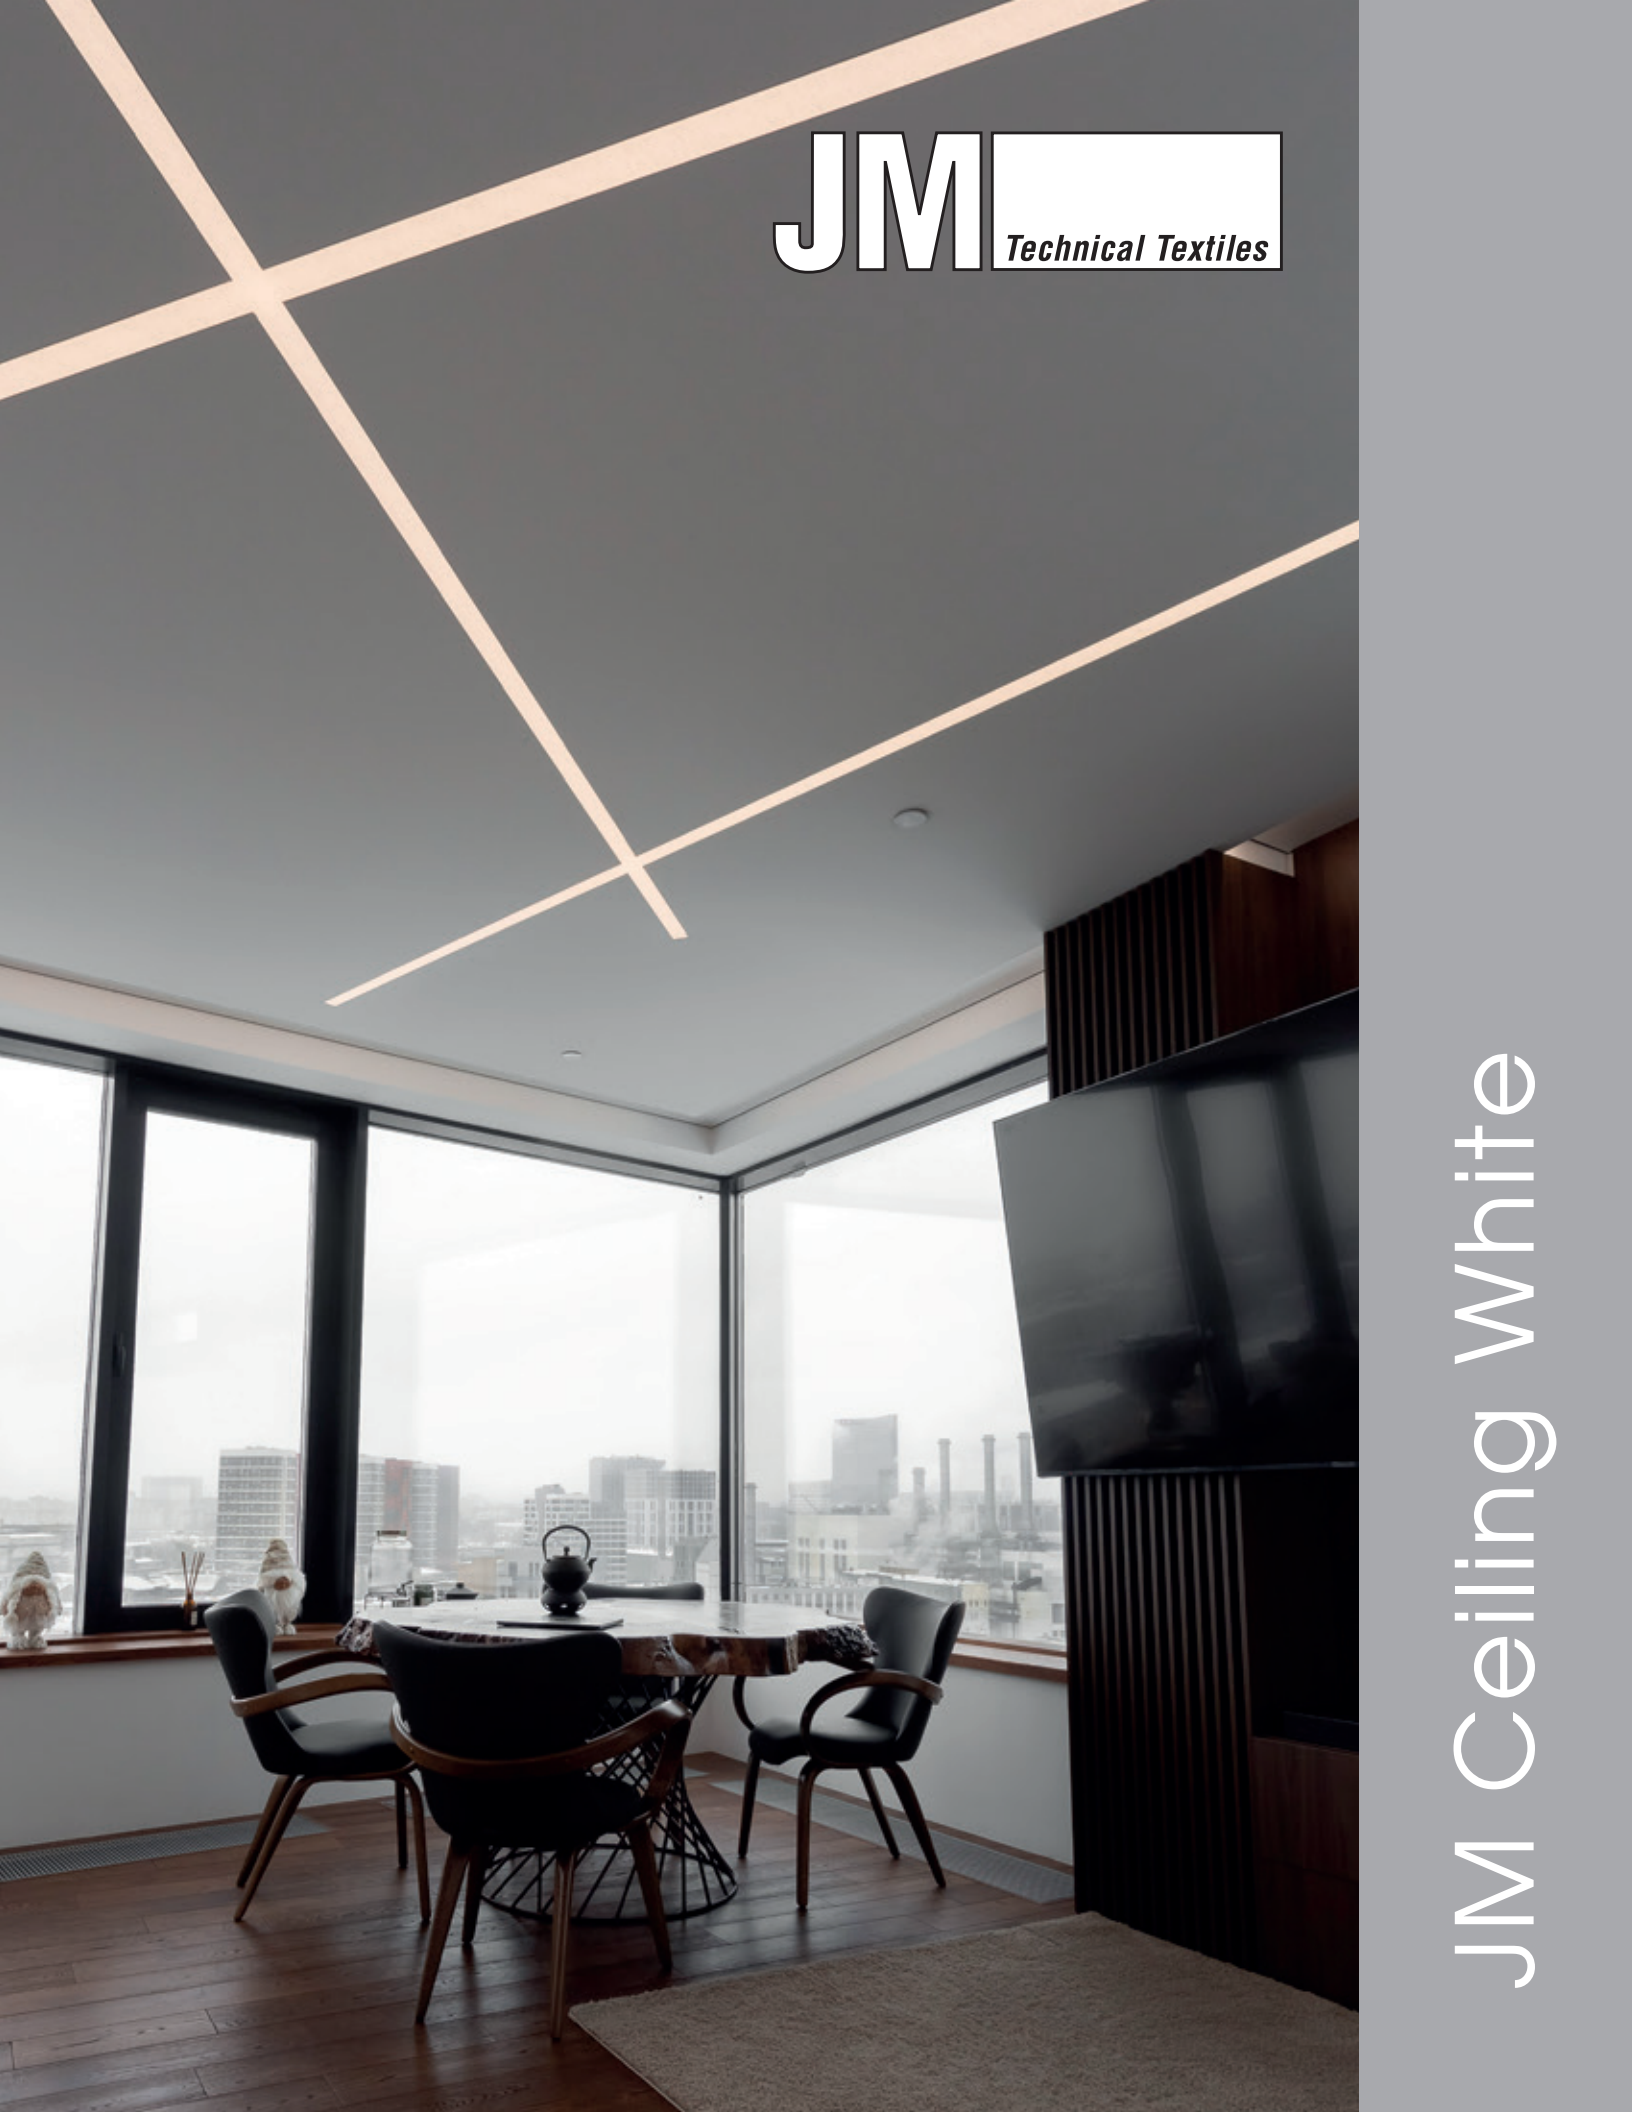


| JM Ceiling FR | | | |
|---|--|--|----------------|
| Article Артикул | 130495 | | 130525 |
| Basic material Основной материал | 100 % polyester (acrylic polymer coated) 100% полиэстер (акриловое полимерное покрытие) | | |
| Weave Тип плетения | woven fabric Ткань | | |
| Width Ширина | 310 cm / 122† | | 510 cm / 201† |
| Weight approx. Вес | EN ISO 2286-2 | 220 g/m ² / 6,5 oz/yd ² | |
| Thickness approx. Толщина | EN ISO 2286-3 | 0,37 mm / 0,015† | |
| Light fastness Светостойкость | EN ISO 105-B02 | 4-5 | |
| Dimensional change (temperature) Изменение размеров (температура) | 110°C, 2 min | warp: ≤ - 0,5 % weft: ≤ - 0,5 % | |
| Dimensional change (moisture) Изменение размеров (влажность) | DIN 53892-2 | warp: ≤ 1 % weft: ≤ 1 % | |
| Tensile strength Предел прочности | EN ISO 1421 | warp: ≥ 80 daN / 5 cm weft: ≥ 50 daN / 5 cm | |
| Tear strength Прочность на разрыв | EN ISO 1875-3 | warp: ≥ 15 N weft: ≥ 10 N | |
| Fire classification Пожарная классификация | EN 13501-1 | DIN 4102 B1, ÖNORM A 3800, M1, NFPA 701, CA 1237 | |
| Light transmittance Коэффициент пропускания света | EN 410 : 16 % | 31 % | |
| Degree of whiteness approx. Степень белизны | according to Berger | approx. 120 | |
| Printability Возможность фотопечати | yes (UV, latex, solvent) да (УФ, латекс, сольвент) | | |
| Care instruction Инструкция по уходу | spongeable моющийся | | |
| Manufacturing guidance Руководство по производству | to cut with cold knife резать макетным ножом | | |
| Roll length approx. Длина рулона | 30 - 50 m / 33 - 55 yd | | 100 m / 109 yd |

The information provided in this document do not exempt processors from carrying out own tests and trials as further handling and processing may show significant effects on our products. Application, utilization and processing of products are beyond our control and are therefore the sole responsibility of the processors.

All specifications are based on average values and may deviate within the standard tolerance limits. Subject to technical modifications.

Product certificates and guarantees

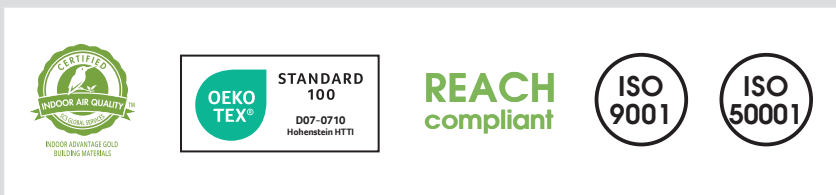

Sustainable building certificates

All JM fabrics certified according to SCS Advantage™ Gold can contribute to credits in sustainable building certifications, such as DGNB, BREEAM and LEED.

